

Absolute encoders – multiturn

**Standard
mechanical multiturn, optical**

Sendix 5868 / 5888 (shaft / hollow shaft)

PROFIBUS DP




The multiturn encoders Sendix 5868 and 5888 with Profibus interface and optical sensor technology are the ideal solution for all Profibus applications.

With a maximum resolution of 28 bits these encoders are available with blind hollow shaft up to 15 mm.




Mechanical drive



Safety-Lock™



High rotational speed



Temperature range
-40°... +80°C



High protection level
IP



High shaft load capacity



Magnetic field proof



Shock / vibration resistant



Reverse polarity protection



SinCos

Reliable

- Tried-and-tested in applications with the highest demands, such as in wind energy or mobile automation.
- Absolutely reliable operation in areas with strong magnetic fields, thanks to mechanical gear with optical sensor technology.

Flexible

- Fast, simple, error-free connection using versions with M12 connector.
- Wide-ranging programming options thanks to latest encoder profile.

Order code Shaft version

8.5868 . X X 3 X . 31 1 X
Type a b c d e f

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

- 1 = clamping flange, IP65 ø 58 mm [2.28"]
- 3 = clamping flange, IP67 ø 58 mm [2.28"]
- 2 = synchro flange, IP65 ø 58 mm [2.28"]
- 4 = synchro flange, IP67 ø 58 mm [2.28"]
- 5 = square flange, IP65 □ 63.5 mm [2.5"]
- 7 = square flange, IP67 □ 63.5 mm [2.5"]

b Shaft (ø x L), with flat

- 1 = 6 x 10 mm [0.24 x 0.39"]¹⁾
- 2 = 10 x 20 mm [0.39 x 0.79"]²⁾
- 3 = 1/4" x 7/8"
- 4 = 3/8" x 7/8"

c Interface / power supply

- 3 = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC

d Type of connection, removable bus terminal cover

- 1 = with radial cable gland fitting
- 2 = with 3 x radial M12 connectors

Optional on request

- Ex 2/22
- surface protection salt spray tested
- seawater resistant (stainless steel V4A)

Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)

salt spray tested:
8.5868.3232.3112-C



stainless steel V4A:
8.5868.3232.3112-V4A



e Fieldbus profile

- 31 = PROFIBUS DP V0 encoder profile class 2

f Options (service)

- 2 = no option
- 3 = SET button

1) Preferred type only in conjunction with flange type 2.


2) Preferred type only in conjunction with flange type 1.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	PROFIBUS DP
---	--	--------------------

Order code Hollow shaft	<table border="1" style="border-collapse: collapse; text-align: center;"> <tr> <td style="padding: 2px;">8.5888</td> <td style="padding: 2px;">.</td> <td style="padding: 2px;"><u>X</u></td> <td style="padding: 2px;"><u>X</u></td> <td style="padding: 2px;">3</td> <td style="padding: 2px;"><u>X</u></td> <td style="padding: 2px;">.</td> <td style="padding: 2px;"><u>31</u></td> <td style="padding: 2px;">1</td> <td style="padding: 2px;"><u>X</u></td> </tr> <tr> <td style="font-size: 8px;">Type</td> <td></td> <td style="font-size: 8px;">a</td> <td style="font-size: 8px;">b</td> <td style="font-size: 8px;">c</td> <td style="font-size: 8px;">d</td> <td></td> <td style="font-size: 8px;">e</td> <td></td> <td style="font-size: 8px;">f</td> </tr> </table>	8.5888	.	<u>X</u>	<u>X</u>	3	<u>X</u>	.	<u>31</u>	1	<u>X</u>	Type		a	b	c	d		e		f	<p style="font-size: 10px;">If for each parameter of an encoder the <u>underlined preferred option</u> is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.</p> <div style="text-align: right; border: 1px solid black; border-radius: 50%; padding: 2px; width: 40px; float: right;">10 by 10</div> <table style="width: 100%; font-size: 10px;"> <tr> <td style="width: 33%; vertical-align: top;"> <p>a Flange</p> <p>1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] <u>5 = with stator coupling, IP65 ø 63 mm [2.48"]</u> 6 = with stator coupling, IP67 ø 63 mm [2.48"]</p> <p>b Blind hollow shaft (insertion depth max. 30 mm [1.18"])</p> <p>3 = ø 10 mm [0.39"] <u>4 = ø 12 mm [0.47"]</u> 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] 8 = ø 3/8" 9 = ø 1/2"</p> </td> <td style="width: 33%; vertical-align: top;"> <p>c Interface / power supply</p> <p><u>3 = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC</u></p> <p>d Type of connection, removable bus terminal cover</p> <p>1 = with radial cable gland fitting <u>2 = with 3 x radial M12 connectors</u></p> <p style="font-size: 9px; margin-top: 10px;"><i>Optional on request</i></p> <ul style="list-style-type: none"> - Ex 2/22 - surface protection salt spray tested - seawater resistant (stainless steel V4A) <p style="font-size: 9px; margin-top: 10px;"><i>Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)</i></p> <table style="width: 100%; font-size: 8px;"> <tr> <td style="text-align: center;"></td> <td style="padding: 0 5px;">salt spray tested:</td> <td style="text-align: center;"></td> <td style="padding: 0 5px;">stainless steel V4A:</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">8.5888.2432.3112-C</td> <td></td> <td style="padding: 0 5px;">8.5888.2432.3112-V4A</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">8.5888.2532.3112-C</td> <td style="text-align: center; border: 1px solid black; padding: 1px;">1.4404</td> <td></td> </tr> </table> </td> <td style="width: 33%; vertical-align: top;"> <p>e Fieldbus profile</p> <p><u>31 = PROFIBUS DP V0 encoder profile class 2</u></p> <p>f Options (service)</p> <p>2 = no option <u>3 = SET button</u></p> </td> </tr> </table>	<p>a Flange</p> <p>1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] <u>5 = with stator coupling, IP65 ø 63 mm [2.48"]</u> 6 = with stator coupling, IP67 ø 63 mm [2.48"]</p> <p>b Blind hollow shaft (insertion depth max. 30 mm [1.18"])</p> <p>3 = ø 10 mm [0.39"] <u>4 = ø 12 mm [0.47"]</u> 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] 8 = ø 3/8" 9 = ø 1/2"</p>	<p>c Interface / power supply</p> <p><u>3 = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC</u></p> <p>d Type of connection, removable bus terminal cover</p> <p>1 = with radial cable gland fitting <u>2 = with 3 x radial M12 connectors</u></p> <p style="font-size: 9px; margin-top: 10px;"><i>Optional on request</i></p> <ul style="list-style-type: none"> - Ex 2/22 - surface protection salt spray tested - seawater resistant (stainless steel V4A) <p style="font-size: 9px; margin-top: 10px;"><i>Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)</i></p> <table style="width: 100%; font-size: 8px;"> <tr> <td style="text-align: center;"></td> <td style="padding: 0 5px;">salt spray tested:</td> <td style="text-align: center;"></td> <td style="padding: 0 5px;">stainless steel V4A:</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">8.5888.2432.3112-C</td> <td></td> <td style="padding: 0 5px;">8.5888.2432.3112-V4A</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">8.5888.2532.3112-C</td> <td style="text-align: center; border: 1px solid black; padding: 1px;">1.4404</td> <td></td> </tr> </table>		salt spray tested:		stainless steel V4A:		8.5888.2432.3112-C		8.5888.2432.3112-V4A		8.5888.2532.3112-C	1.4404		<p>e Fieldbus profile</p> <p><u>31 = PROFIBUS DP V0 encoder profile class 2</u></p> <p>f Options (service)</p> <p>2 = no option <u>3 = SET button</u></p>
8.5888	.	<u>X</u>	<u>X</u>	3	<u>X</u>	.	<u>31</u>	1	<u>X</u>																												
Type		a	b	c	d		e		f																												
<p>a Flange</p> <p>1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] <u>5 = with stator coupling, IP65 ø 63 mm [2.48"]</u> 6 = with stator coupling, IP67 ø 63 mm [2.48"]</p> <p>b Blind hollow shaft (insertion depth max. 30 mm [1.18"])</p> <p>3 = ø 10 mm [0.39"] <u>4 = ø 12 mm [0.47"]</u> 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] 8 = ø 3/8" 9 = ø 1/2"</p>	<p>c Interface / power supply</p> <p><u>3 = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC</u></p> <p>d Type of connection, removable bus terminal cover</p> <p>1 = with radial cable gland fitting <u>2 = with 3 x radial M12 connectors</u></p> <p style="font-size: 9px; margin-top: 10px;"><i>Optional on request</i></p> <ul style="list-style-type: none"> - Ex 2/22 - surface protection salt spray tested - seawater resistant (stainless steel V4A) <p style="font-size: 9px; margin-top: 10px;"><i>Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)</i></p> <table style="width: 100%; font-size: 8px;"> <tr> <td style="text-align: center;"></td> <td style="padding: 0 5px;">salt spray tested:</td> <td style="text-align: center;"></td> <td style="padding: 0 5px;">stainless steel V4A:</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">8.5888.2432.3112-C</td> <td></td> <td style="padding: 0 5px;">8.5888.2432.3112-V4A</td> </tr> <tr> <td></td> <td style="padding: 0 5px;">8.5888.2532.3112-C</td> <td style="text-align: center; border: 1px solid black; padding: 1px;">1.4404</td> <td></td> </tr> </table>		salt spray tested:		stainless steel V4A:		8.5888.2432.3112-C		8.5888.2432.3112-V4A		8.5888.2532.3112-C	1.4404		<p>e Fieldbus profile</p> <p><u>31 = PROFIBUS DP V0 encoder profile class 2</u></p> <p>f Options (service)</p> <p>2 = no option <u>3 = SET button</u></p>																							
	salt spray tested:		stainless steel V4A:																																		
	8.5888.2432.3112-C		8.5888.2432.3112-V4A																																		
	8.5888.2532.3112-C	1.4404																																			

Mounting accessory for shaft encoders	Order no.	
Coupling	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"] bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	8.0000.1102.0606 8.0000.1102.1010

Mounting accessory for hollow shaft encoders	Order no.	
Cylindrical pin, long for flange with spring element (flange type 1 + 2)	Dimensions in mm [inch] with fixing thread 	8.0010.4700.0000

Connection technology	Order no.
Cordset, pre-assembled	M12 female connector with coupling nut for bus in , 5-pin 5 m [16.40'] PUR cable 05.00.6011.3211.005M
	M12 male connector with external thread for bus out, 5-pin 5 m [16.40'] PUR cable 05.00.6011.3411.005M
	M12 female connector with coupling nut for power supply, 4-pin 2 m [6.56'] PUR cable 05.00.6061.6211.002M
Connector, self-assembly (straight)	M12 female connector with coupling nut for bus in , 5-pin 05.BMWS 8151-8.5 M12 male connector with external thread for bus out, 5-pin 05.BMSWS 8151-8.5 M12 female connector with coupling nut for power supply, 4-pin 05.B8141-0

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	PROFIBUS DP
---	--	--------------------

Technical data

Mechanical characteristics		
Maximum speed	IP65 up to 70°C [158°F]	9000 min ⁻¹ , 7000 min ⁻¹ (continuous)
	IP65 up to T _{max}	7000 min ⁻¹ , 4000 min ⁻¹ (continuous)
	IP67 up to 70°C [158°F]	8000 min ⁻¹ , 6000 min ⁻¹ (continuous)
	IP67 up to T _{max}	6000 min ⁻¹ , 3000 min ⁻¹ (continuous)
Starting torque - at 20°C [68°F]	IP65	< 0.01 Nm
	IP67	< 0.05 Nm
Mass moment of inertia	shaft version	3.0 x 10 ⁻⁶ kgm ²
	hollow shaft version	7.5 x 10 ⁻⁶ kgm ²
Load capacity of shaft	radial	80 N
	axial	40 N
Weight	with bus terminal cover	approx. 0.57 kg [10.11 oz]
	with fixed connection	approx. 0.52 kg [18.34 oz]
Protection acc. to EN 60529	housing side	IP67
	shaft side	IP65, opt. IP67
Working temperature range		-40°C ... +80°C [-40°F ... +176°F]
Materials	shaft / hollow shaft	stainless steel
	flange	aluminum
	housing	zinc die-cast
Shock resistance acc. to EN 60068-2-27		2500 m/s ² , 6 ms
Vibration resistance acc. to EN 60068-2-6		100 m/s ² , 55 ... 2000 Hz

Interface characteristics PROFIBUS DP	
Resolution singleturn	1 ... 65536 (16 bit), scalable default: 8192 (13 bit)
Number of revolutions (multiturn)	1 ... 4096 (12 bit), scalable
Total resolution	1 ... 268.435.456 (28 bit), scalable default: 33.554.432 (25 bit)
Code	binary
Interface	Interface specification acc. to PROFIBUS-DP 2.0 / standard (DIN 19245 part 3) / RS485 driver galvanically isolated
Protocol	Profibus encoder profile V1.1 class1 and class 2 with manufacturer-specific add-ons
Baud rate	max. 12 Mbit/s
Device address	1 ... 127 set by rotary switches
Termination switchable	set by DIP switches

Electrical characteristics	
Power supply	10 ... 30 V DC
Power consumption (no load)	max. 120 mA
Reverse polarity protection of the power supply	yes
UL approval	file 224618
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

SET button (zero or defined value, option)

Protection against accidental activation.
Button can only be operated with a ball-pen or pencil.

Diagnostic LED (yellow)

LED is ON with following errors Sensor error (Profibus error)

Profibus encoder profile V1.1

The PROFIBUS DP device profile describes the functionality of the communication and the user-specific component within the Profibus field bus system. For encoders, the encoder profile is definitive. Here the individual objects are defined independent of the manufacturer. Furthermore, the profiles offer space for additional manufacturer-specific functions; this means that Profibus-compliant device systems can be used now with the guarantee that they are ready for the future too.

The following parameters can be programmed

- Direction of rotation.
- Scaling (number of steps per revolution).
- Preset value.
- Diagnostics mode.

The following functionality is integrated

- Galvanic isolation of the bus stage with DC/DC converter.
- Line driver acc. to RS485 max. 12 MB.
- Address programmable via DIP switches.
- Diagnostics LED.
- Full class 1 and class 2 functionality.

Terminal assignment terminal box

Interface	Type of connection	BUS IN				BUS OUT				The shield of the connection cable must be connected over a large area via the cable gland.	
		Signal:	B	A	0 V	+V	0 V	+V	B		A
3	1 (terminal box)	Terminal:	1	2	3	4	5	6	7	8	

Interface	Type of connection	Function	3 x M12 connector						
			Signal:						
3	2 (3 x M12 connector)	Bus in	Signal:	–	PB_A	–	PB_B	Shield	
			Pin:	1	2	3	4	5	
		Power supply	Signal:	+V	–	0 V	–		
			Pin:	1	2	3	4		
		Bus out	Signal:	BUS_VDC ¹⁾	PB_A	BUS_GND ¹⁾	PB_B	Shield	
			Pin:	1	2	3	4	5	

1) For supplying an external Profibus DP termination resistor.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	PROFIBUS DP
---	--	--------------------

Dimensions shaft version, with removable bus terminal cover


Dimensions in mm [inch]

Synchro flange, \varnothing 58 [2.28]

Flange type 2 and 4

(drawing with cable)

- ① 3 x M4, 6 [0.24] deep

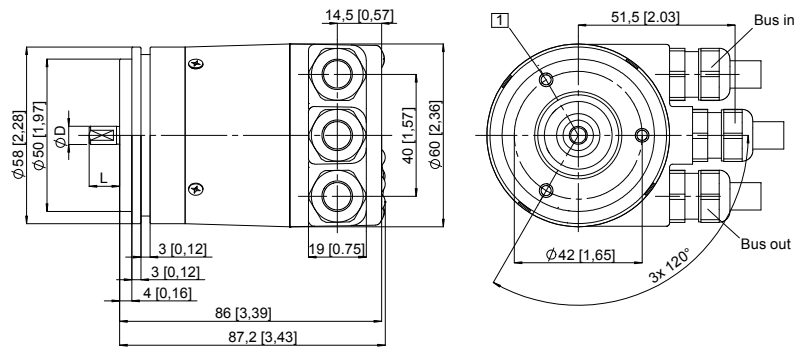


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Clamping flange, \varnothing 58 [2.28]

Flange type 1 and 3

(drawing with 3 x M12 connector)

- ① 3 x M3, 6 [0.24] deep
- ② 3 x M4, 8 [0.32] deep

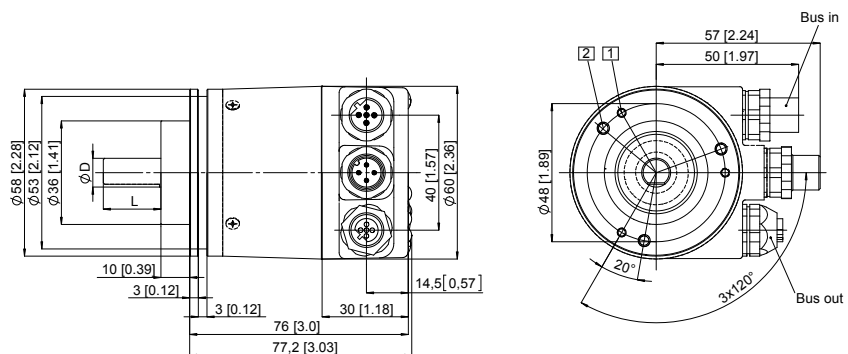


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Square flange, \square 63.5 [2.5]

Flange type 5 and 7

(drawing with cable)

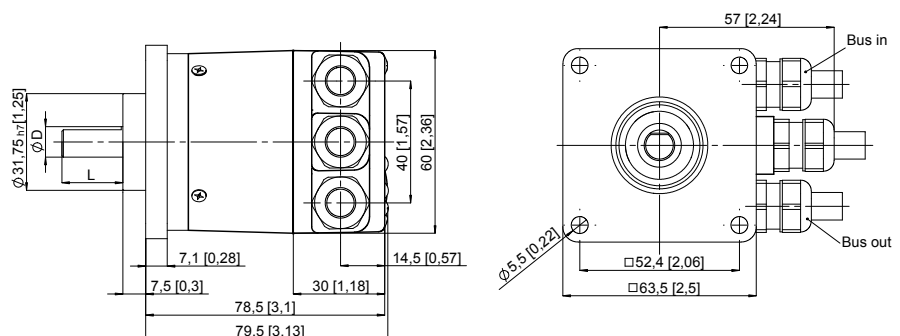

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Absolute encoders
multiturn

Absolute encoders – multiturn

**Standard
mechanical multiturn, optical**

Sendix 5868 / 5888 (shaft / hollow shaft)

PROFIBUS DP

Dimensions hollow shaft version (blind hollow shaft), with removable bus terminal cover



Dimensions in mm [inch]

Flange with spring element, long

Flange type 1 and 2

(drawing with 3 x M12 connector)

- 1 Slot spring element recommendation: cylindrical pin DIN 7, $\varnothing 4$ [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the clamping ring 0.6 Nm

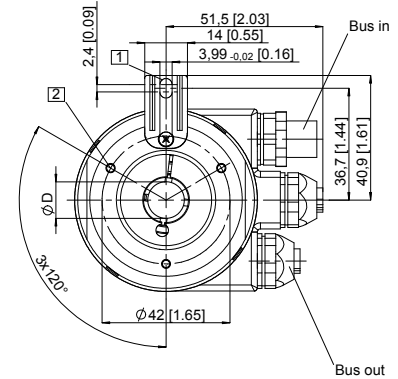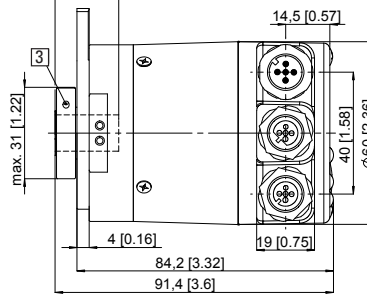

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

Flange with stator coupling, $\varnothing 63$ [2.48]



Flange type 5 and 6

Pitch circle diameter for fixing screws 63 [2.48]

63 [2.48]

(drawing with cable)

- 1 Recommended torque for the clamping ring 0.6 Nm

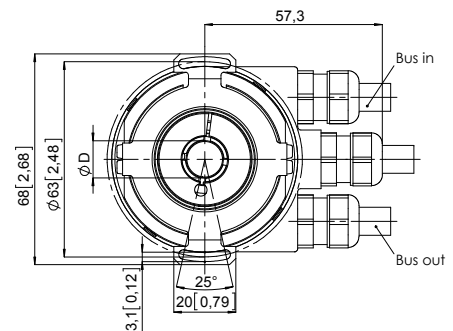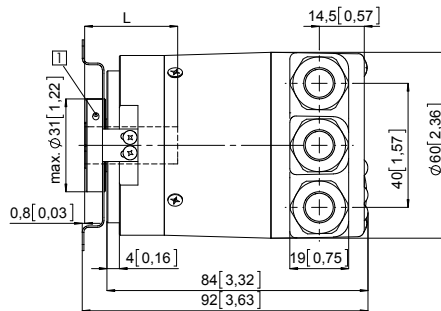

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

Flange with stator coupling, $\varnothing 65$ [2.56]



Flange type 3 and 4

Pitch circle diameter for fixing screws 65 [2.56]

65 [2.56]

(drawing with 3 x M12 connector)

- 1 Recommended torque for the clamping ring 0.6 Nm

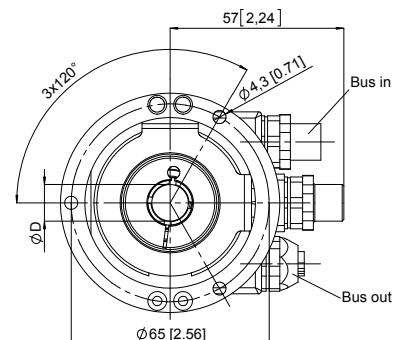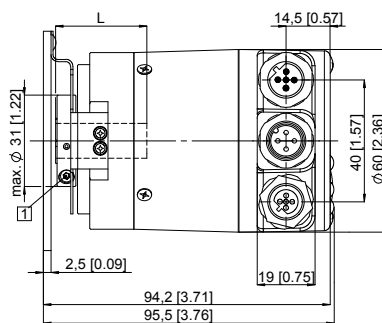

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft